

One Piece Fixing Ties with Arrowhead

Features and Benefits

The arrowhead design, in conjunction with the supporting 'legs', ensures a firm and secure fixing. The 'legs' take up any variation in panel thickness enabling one part to suit many applications.


Both the RT and FBS versions are releasable and reusable, with the FBS type having the added feature of a ladder type strap as opposed to the conventional serrated strap - this ladder type strap has the benefit of being very flexible.

Application

For the bundling and fixing of cable harnesses, pipes and hoses in the automotive, aerospace, white goods industries and panel building.

Application Tool	Registration Numbers
MK3SP	1
MK3PNSP2, MK7P	2
MK7	3
MK7HT	4
MK20	5
MK6	6
MK9P, MK6PN	7
MK9	8
MK9HT	9
MK21	10

For more information on Application Tools please refer to Page 2/10.

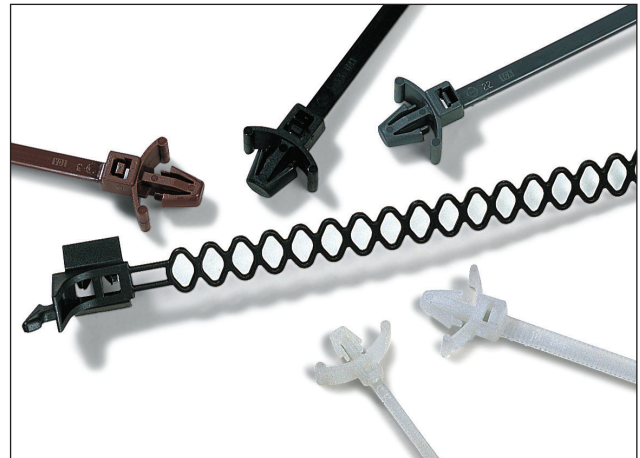

A wide range of arrowhead fixing ties which are suitable for panel thicknesses of 0.5 mm to 4.5 mm and hole diameters of 4.4 mm to 8.0 mm.

Material Data

RoHS	Material	Polyamide 6.6 (PA66)	HF (halogenfree)
	Operating Temperature	-40°C to +85°C Continuous, (+105°C for 500 h)	
	Flammability	UL94 V2	

Material Data

RoHS	Material	Polyamide 6.6 Heat Stabilised (PA66HS)	HF (halogenfree)
	Operating Temperature	-40°C to +105°C Continuous, (+145°C for 500 h)	
	Flammability	UL94 V2	

Material Data

RoHS	Material	Polyamide 6.6 UV Resistant (PA66W)	HF (halogenfree)
	Operating Temperature	-40°C to +85°C Continuous, (+105°C for 500 h)	
	Flammability	UL94 V2	

Material Data

RoHS	Material	Polyamide 4.6 (PA46)	HF (halogenfree)
	Operating Temperature	-40°C to +150°C for 5000 h, (+195°C for 500 h)	
	Flammability	UL94 V2, Limited Fire Hazard, Halogen free, Low smoke generation, Low generation of toxic gases and corrosive acid	