


SpeedyTie®

Features and Benefits


The SpeedyTie® can be used many times because of its removable, patented trigger. Also this is a heavy duty releasable tie that can bear loads of up to 888N (200lbs). With a length of 750 mm it suits a wide variety of applications and is easy to handle even when wearing work gloves. Any excess tail can be easily 'tucked away' in a second slot on the head. These ties are available in 'high visibility' yellow and in weatherproof black.

Application

The versatility of the SpeedyTie® means that it is suitable for a multitude of applications. Originally developed for the 'offshore' industries, other uses include construction, electrical installations, scaffolding sheet installations, exhibitions, trade fairs, and many more.

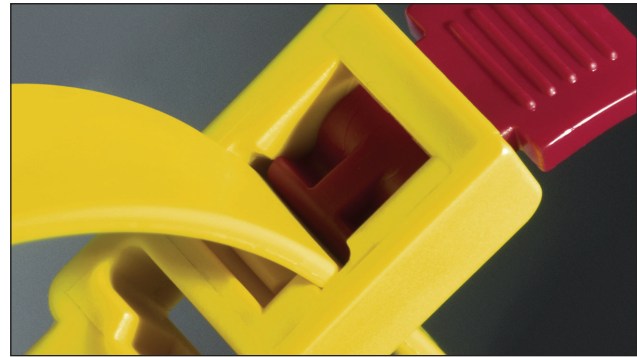

Patented quick release mechanism for quick and easy application.

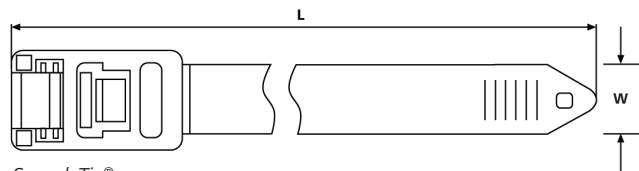

SpeedyTie®

Material Data


RoHS	Material	Polyamide 6.6 (PA66)	HF (halogenfree)
	Operating Temperature	-40°C to +85°C Continuous, (+105°C for 500 h)	
	Flammability	UL94 V2	

Material Data


RoHS	Material	Polyamide 6.6 High Impact Modified scan black (PA66HIR(S))	HF (halogenfree)
	Colour	Black (BK)	
	Operating Temperature	-40°C to +80°C Continuous, (+105°C for 500 h)	
	Flammability	UL94 HB	



SpeedyTie® - Quick and easy.

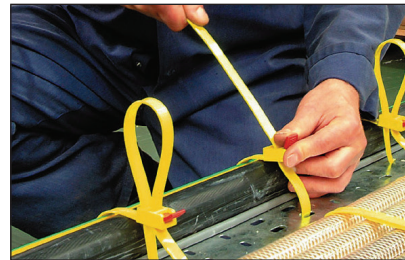

Excess tails can be neatly tucked away.

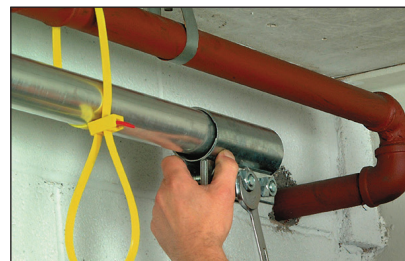

SpeedyTie® is particularly suited for temporary but safe bundling or fixing.

Technical Table

Code	Length (L)	Width (W)	Bundle Ø max.	Min. Tensile Strength (N)	Colour	Material	Pack Cont.
RTT750HR	750	13	210	888	Yellow (YL), Red (RD)	PA66	25
RTT750HR	750	13	210	888	Yellow (YL), Red (RD)	PA66	5
RTT750HR	750	13	210	888	Black (BK), Black (BK)	PA66HIR(S)	5

All dimensions in mm. Subject to technical changes.