

## Helafix Carriers HC and HCR

### Features and Benefits

The versatile Helafix HC and HCR character carriers are suitable for temporary or permanent marking. They are fixed in place using series T18 cable ties, screws or rivets. They are also easy to attach for temporary marking.


Material and profile reliably protect the inserted label against damp, dirt, damage and UV radiation.

Helafix HC is supplied as cut lengths in bags, pre-cut and pre-punched. Helafix HCR is supplied in reel format and can be cut to size with the appropriate HCT tools.

We recommend HFX labels printed on an office laser printer using our Tagprint Pro labelling software.


### Application

Marking of cable looms, cables, pipes, transport systems, valves, sensors, for inventory marking on machines or other parts.

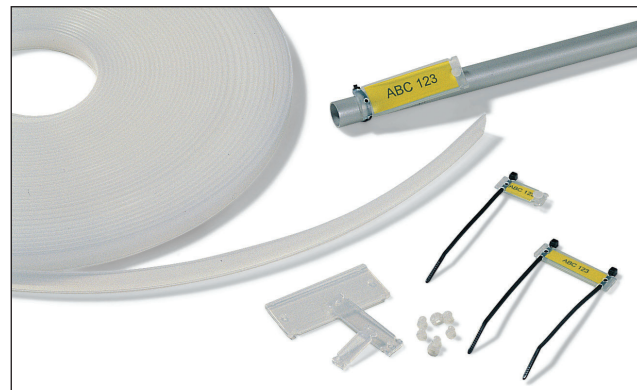

Multi-purpose identification potential: Helafix HC and HCR.

#### Material Data

RoHS	Material	Polyethelene, UV Resistant (PEUV)
	Colour	Transparent (CL)
	Chem. Material	Excellent resistance to UV light, oils, Water and a variety of solvents.
	Properties	Water and a variety of solvents.
	Operating Temperature	-60°C to +65°C
	Flammability	UL94 HB
	 (halogenfree)	

#### Technical Table

Code	Length (L)	Height (H)	Recommended Labels	Quantity	Reel Length	Application Tool
<b>Helafix HC</b>						
HC06	17.5	7.0	–	50	–	–
HC06	35.0	7.0	–	50	–	–
HC09	17.5	10.0	HFX9-17P	50	–	–
HC09	35.0	10.0	HFX9-35P	50	–	–
HC09	52.0	10.0	HFX9-52P	50	–	–
HC12	17.5	13.0	–	50	–	–
HC12	35.0	13.0	HFX12-35P	50	–	–
HC12	52.0	13.0	HFX12-52P	50	–	–
HC12	70.0	13.0	–	50	–	–
HC18	35.0	19.0	–	50	–	–
HC18	52.0	19.0	–	50	–	–
HC18	70.0	19.0	–	50	–	–
HC24	52.0	25.0	–	50	–	–
HC24	70.0	25.0	–	50	–	–
<b>Helafix HCR</b>						
HCR06	–	7.0	–	–	25 m	–
HCR09	–	10.0	HFX9	–	25 m	HCT1
HCR12	–	13.0	HFX12	–	25 m	HCT2
HCR18	–	19.0	–	–	25 m	–
HCR24	–	25.0	–	–	25 m	–

All dimensions in mm. Subject to technical changes.

